



## Absolute Maximum Ratings

Over Operating Free-air Temperature Range (Unless Otherwise

Rating	Value	Unit
Supply voltage ,Vcc	41	V
Amplifier input voltage	Vcc+0.3	
Collector output voltage	41	
Collector output current	250	mA
Operating free-air temperature range	0 to 70	° C
Storage temperature range	-65 to 150	
Lead temperature 1,6 mm from case for 10 seconds	260	

## Recommended Operating Conditions

Parameter	Value		Unit
	MIN	MAX	
Supply voltage ,Vcc	7	40	V
Amplifier input voltage ,Vi	-0.3	Vcc-2	
Collector output voltage ,Vo		40	
Collector output current (each transistor)		200	mA
Current into feedback terminal		0.3	
Timing capacitor ,CT	0.0047	10	μF
Timing resistor ,RT	1.8	500	kΩ
Oscillator frequency	1	200	kHz
Operating free-air temperature ,TA	0	70	° C

## Electrical Characteristics

Over Operating Free-air Temperature Range,Vcc=15V,f=10kHz (Unless Otherwise Noted)

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Output voltage(Vref)	Io=1mA	4.9	5	5.1	V
	Io=1mA,TA=25° C****	4.95	5	5.05	
Line regulation	Vcc=7V to 40V		2	25	mV
Load regulation	Io=1Ma to 10mA		1	15	
Short-circuit output current***	Vref=0	10	35	50	mA

## Oscillator section (See Figure 1)

Parameter	Test conditions*	Value			Unit
		MIN	TYP**	MAX	
Frequency	$C_T=0.01\mu F, R_T=12K\Omega, T_A=25^\circ C$	9.2	10	10.8	kHz
Frequency	$C_T=0.01\mu F, R_T=12K\Omega$	9.0	-	12	
Frequency change with temperature *****	$C_T=0.01\mu F, R_T=12K\Omega$ $\Delta T_A=MIN TO MAX$			2	

## Amplifier section (See Figure 2)

Parameter	Test conditions	Value			Unit
		MIN	TYP*	MAX	
Input offset voltage	$V_o(\text{pin } 3)=2.5V$		2	10	mV
Input offset current	$V_o(\text{pin } 3)=2.5V$		25	250	nA
Input bias current	$V_o(\text{pin } 3)=2.5V$		0.2	1	$\mu A$
Common-mode input voltage range	$V_{CC}=7V$ to 40V	-0.3 to $V_{CC}-2$			V
Open-loop voltage amplification	$\Delta V_o=3V, R_L=2K\Omega,$	70	95		dB
Unity-gain bandwidth			650		kHz

## Output Section

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Collector off-state current	$V_{CE}=40V, C_{CC}=40V$		2	100	$\mu A$
Emitter off-state current	$V_{CC}=V_C=40V, V_E=0$			-100	
Collector-emitter saturation voltage	Common-emitter		1.1	1.3	V
	Emitter-follower		1.5	2.5	
Output control input current	$V_I=V_{ref}$			3.5	mA

## Dead -Time Control - Section(See Figure

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Input bias current (pin 4)	$V_I=0$ to 5.25V		-2	-10	$\mu A$
Maximum duty cycle, each output	$V_I(\text{pin } 4)=0, O.C.=V_{ref}$	45			%
Input threshold voltage (pin 4)	Zero duty cycle		3	3.3	V
	Maximum duty cycle	0			

## P M Comparator Section(See Figure 1)

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Input threshold voltage(pin 3)	Zero duty cycle		4	4.5	V
Input sink current (pin 3)	$V(\text{pin } 3)=0.7V$	0.3	0.7		mA

## Total Device

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Standby supply current	Pin 6 at Vref Vcc=15V		6	10	mA

## Switching Characteristics, T 25°C

Parameter	Test conditions	Value			Unit
		MIN	TYP**	MAX	
Output voltage rise time	Common-emitter configuration, See figure 3		100	200	ns
Output voltage fall time			25	100	
Output voltage rise time	Emitter-follower configuration. See Figure 4		100	200	
Output voltage fall time			25	100	

\*For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions.


\*\*All typical values except for parameter changes with temperature are at TA=25° C

\*\*\*Duration of the short-circuit should not exceed one second

\*\*\*\*This is guaranteed where the marking code on the package surface is “A”

\*\*\*\*\*Temperature coefficient of timing capacitor and timing resistor not taken into account.

## Parameter Measurement Information

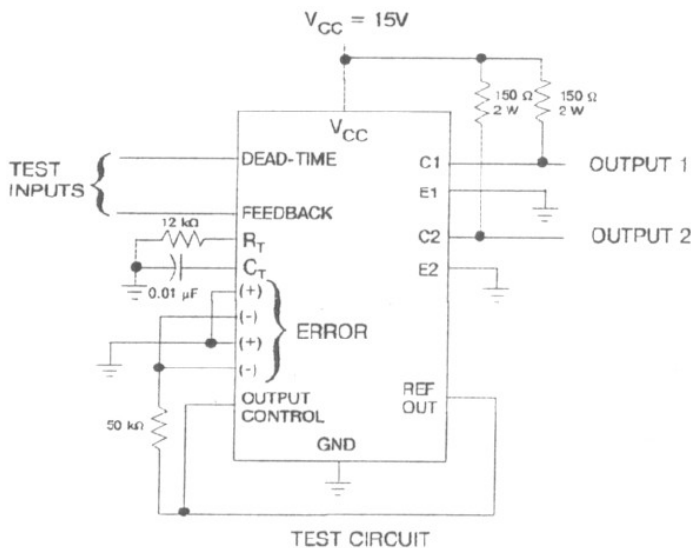

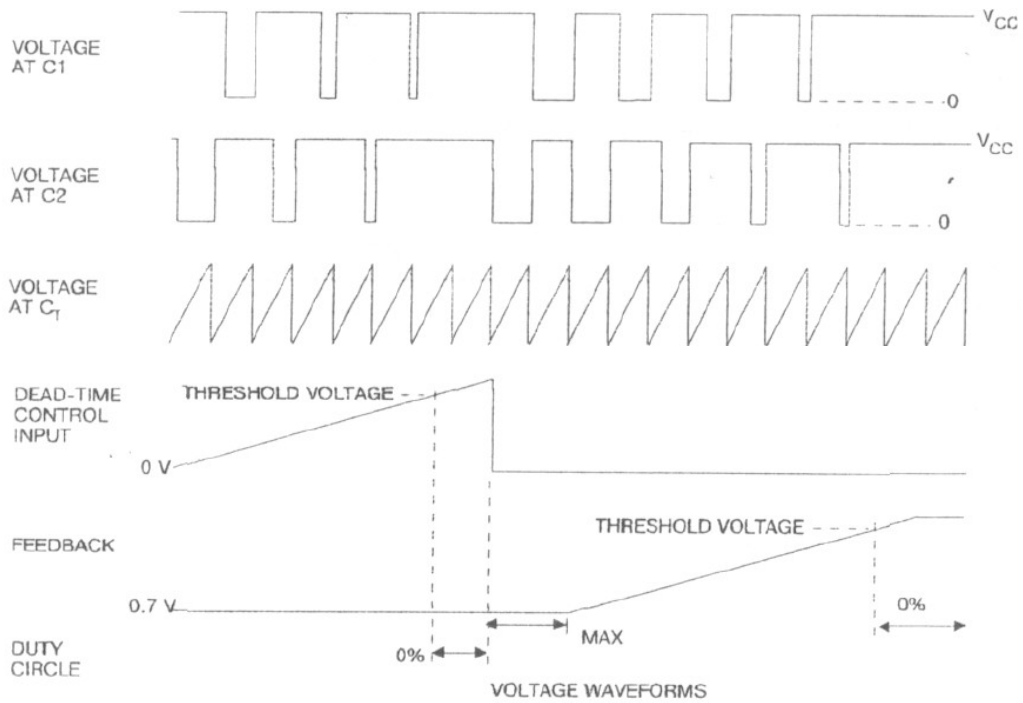


Figure 1. Operational test circuit and waveforms

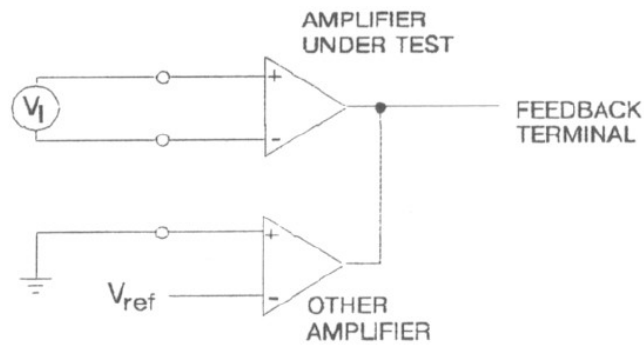


Figure 2. Amplifier characteristics

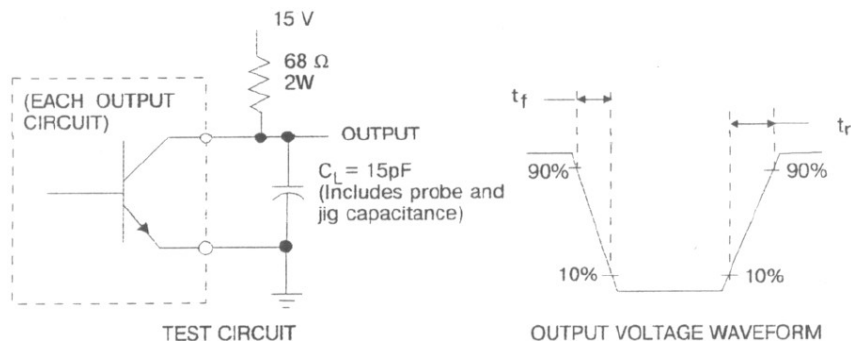


Figure 3. Common - emitter configuration

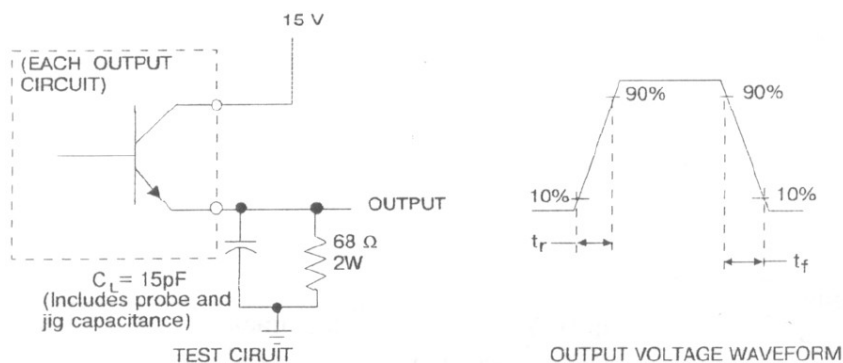


Figure 4. Emitter - follower configuration

## Ordering Information

ORDERING NUMBER	PACKAGE	MARKING
KA7500	DIP-16	KA7500

Address : 北京市海淀区永定路 88 号长银大厦 6A06--6A07

Rm 6A07, Changyin Office Building ,No.88, Yong Ding Road, Hai Dian District ,Beijing

Postalcode: 100039

Tel: 86-010-58895780 / 81 / 82 / 83 / 84 Fax : 010-58895793

Http://www.estek.com.cn

Email:sales@estek.com.cn

REV No:01-060816